


Product Code

LSM

PIPE LOCK SEAMER

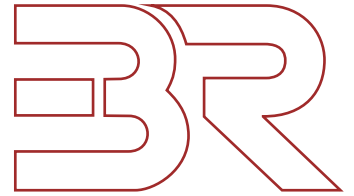

Seams locked pipes - internal, outward or middle twist - with pneumatic pressure, for pipe diameters from 150 mm up to 1000 mm. Ideal for ventilation pipes and solar energy systems that require aesthetics and tightness. Eliminates hammer noise during seaming and seams a 120 cm pipe properly in about 3 seconds.



DETAILS AND OPTIONS

- Gearbox-driven pinching system
- Easy operation with pneumatic pressing piston
- Pinching and rotation controlled by a standard foot pedal
- Pneumatic system protected by an air filter

- Hardened seaming rolls
- Sheet thickness up to 1.2 mm
- Power supply 380V / 3Ph / 50Hz
- Sliding system with ball bearings
- Built according to EC safety directives, CE marked
- User's manual

Model	Seaming Diameter (max/min)	Press Force	Weight	Motor Power	Working Length	Working Pressure	Dimensions
	mm	kgf	kg	kW	mm	bar	LxWxH mm
LSM 15	1000 / 150	1000	300	0.37	1300	8	1740x520x1260

Sheet thickness capacities are given for ST37 (S235JR) mild steel, yield strength 235 N/mm² (24 kg/mm²).

EBR HVAC

www.ebrhvac.com

EBR HVAC

by EBR METAL

EBR METAL MAKİNE İÇ VE DIŞ TİC. LTD. ŞTİ.

Headquarters & Sales Office: Araplar Mah. Ankara Cad. No: 74/28, Karatay / Konya / Türkiye

Factory: Konya / Türkiye

T: +90 332 502 88 48 – 49 | WhatsApp: +90 537 951 62 02

sales@ebrhvac.com | info@ebrhvac.com

www.ebrhvac.com